




PicoForte3 SC-D

CE
0301

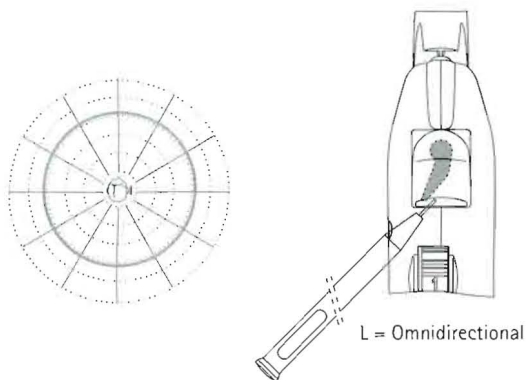


SSPL



- 6 = 121 dB SPL (Max. Gain 55 dB)
- 5 = 117 dB SPL (Max. Gain 50 dB)
- 4 = 113 dB SPL (Max. Gain 46 dB)
- 3 = 109 dB SPL (Max. Gain 41 dB)
- 2 = 104 dB SPL (Max. Gain 36 dB)
- 1 = 100 dB SPL (Max. Gain 32 dB)

dB SPL Output

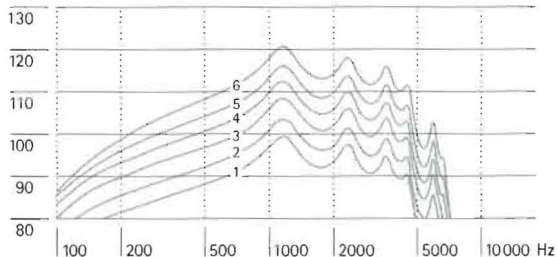


SSPL 6-1

LOW-CUT (LC)





dB Gain

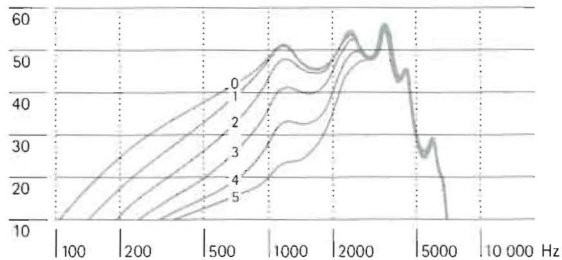

LC 0-5

Preliminary 2cm³ coupler datas

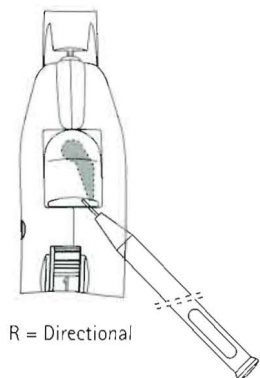


SSPL



- 6 = 121 dB SPL (Max. Gain 55 dB)
- 5 = 117 dB SPL (Max. Gain 50 dB)
- 4 = 113 dB SPL (Max. Gain 46 dB)
- 3 = 109 dB SPL (Max. Gain 41 dB)
- 2 = 104 dB SPL (Max. Gain 36 dB)
- 1 = 100 dB SPL (Max. Gain 32 dB)

dB SPL Output

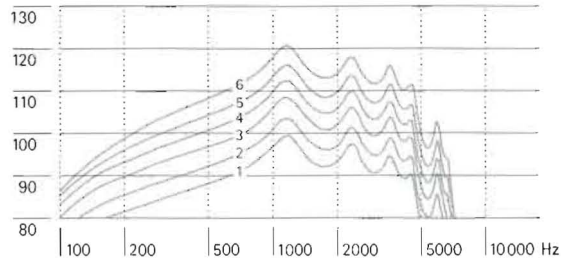


LOW-CUT (LC)



LC 0-5

dB Gain

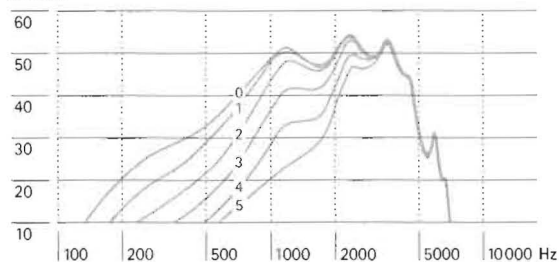Preliminary 2cm³ coupler data